



## Relay Trouble Shooting

Spade connections:

1

4

7


A

3

6

9

B

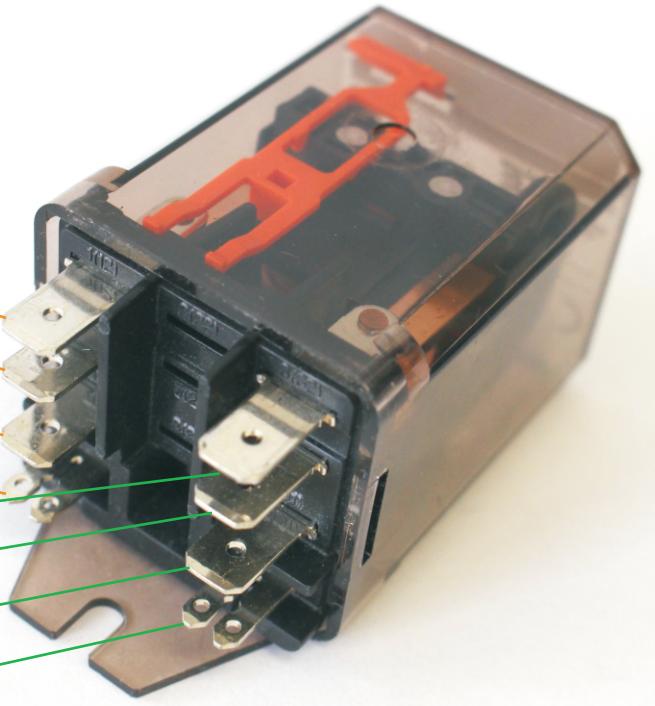

**Unplug distiller before performing any work.**

Spades 1 & 7 should be conductive (open)

Spades 3 & 9 should be conductive (open)

No other spade connections should be conductive with each other.

Occasionally carbon deposit buildup on the coil contact points will create heat and then pull away. This reaction allows the distiller to work for 5-10 minutes until the leads get hot at which point they then stop heating. Once they cool down water production begins again for another 5-10 minutes.